



## PALL ENDOTOXIN FILTER CARTRIDGES

### DESCRIPTION:

The Pall cartridges, offered exclusively from AmeriWater, incorporate a patented covalent charge modified highly asymmetric hydrophilic polysulfone membrane, which provides retention of fine particles smaller than the membranes 0.2 micron rating.

### FEATURES:

- Patented highly asymmetric membrane provides higher flow rates at lower pressure drops (5 GPM at 2.4 PSI  $\Delta P$  per 10" length)
- Hydrophilic media requires no pre-wetting
- Extended life – cleanable, sanitizable (PAA and heat)
- Three times the endotoxin retention of comparable products on the market
- Materials of Construction: Polypropylene, Polysulfone

QUALITY ASSURED: Validated for use in dialysis water systems. FDA clearance under AmeriWater 510K for Water Purification Systems.




### SPECIFICATIONS

Model	Connection	For Housing	Maximum Flow (GPM)
20-3045	222 O-Ring	12"	5
20-3046	222 O-Ring	20"	10

Below is a 10" filter in a 10" housing with 3/4" connections @ 5 gpm. Filter DP= 2.4 psid, housing DP= 0.33 psid

X-Axis : Flow Rate = gpm Y-Axis : DP = psid

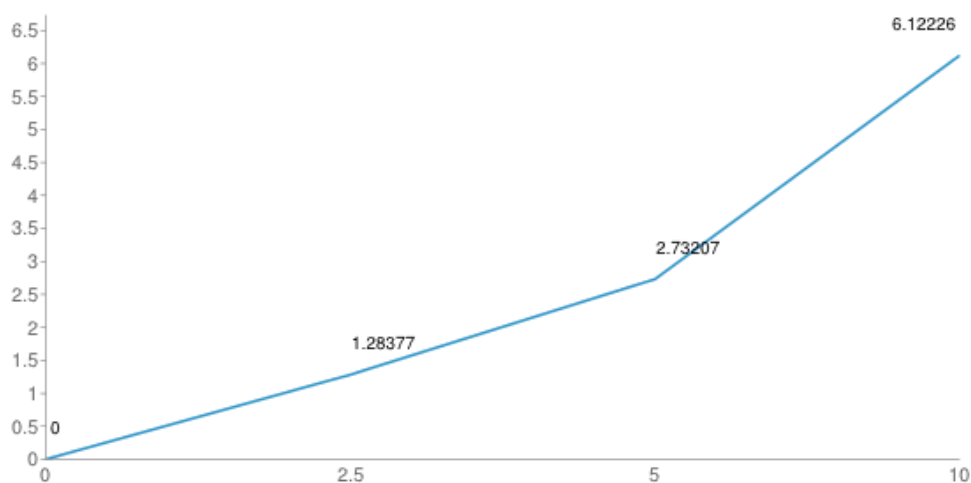

This endotoxin and bacteria filter provides up to 12 months of service or until the endotoxin capacity has been exceeded.